



# VCON GLOBAL TRADING

Web: [www.vcongt.com](http://www.vcongt.com)  
Email: [sales@vcongt.com](mailto:sales@vcongt.com)  
Phone: +971 50 768 9645  
City Free Zone, Sharjah  
United Arab Emirates



## 中国PVC软管制造商

MANUFACTURER OF PVC HOSE IN CHINA

2018

# 目录 Contents

## PVC钢丝增强软管



### PVC STEEL WIRE REINFORCED HOSE

薄装钢丝管	LIGHT DUTY STEEL WIRE HOSE	1
厚装钢丝管	HEAVY DUTY STEEL WIRE HOSE	2
耐高温钢丝管	HIGH-TEMPERATURE RESISTANT STEEL WIRE HOSE	3
耐低温钢丝管	LOW-TEMPERATURE RESISTANT STEEL WIRE HOSE	3
食品级钢丝管	FOOD GRADE STEEL WIRE HOSE	4
防静电钢丝管	ANTI-STATIC STEEL WIRE HOSE	5
钢丝纤维复合管	STEEL&FIBER COMPOSITE HOSE	6

## PVC纤维增强软管



### PVC FIBER REINFORCED HOSE

薄装纤维增强软管	LIGHT DUTY FIBER HOSE	7
厚装纤维软管	HEAVY DUTY FIBER HOSE	8
食品级纤维管	FOOD GRADE FIBER HOSE	9
空气管	AIR HOSE	10
特制气压管	SPECIALIZED AIR HOSE	11
耐高温/低温纤维软管	HIGH/LOW TEMPERATURE RESISTANT FIBER HOSE	12
透明管/煤气管	TRANSPARENT HOSE/GAS HOSE	13

## PVC花园增强软管



### PVC GARDEN REINFORCED HOSE

花园管	PVC GARDEN HOSE	14
防扭曲钩编管	ANTI-TORISON PVC HOSE	15
特制花园管(4层)	SPECIALIZED GARDEN HOSE	16
扁平线管	FLAT PVC REINFORCED HOSE	17
花园管配件	GARDEN HOSE FITTINGS	18

## PVC优质高压水带



### PVC QUALITY HIGH PRESSURE LAYFLAT HOSE

超轻型水带(2/3BAR)	SUPER LIGHT DUTY (2/3BAR)	19
轻型水带(4BAR)	LIGHT DUTY (4BAR)	20
中型水带(6BAR)	MEDIUM DUTY (6BAR)	21
重型水带(8/10BAR)	HEAVY DUTY (8/10BAR)	22
QFLEX水带	QFLEX LAYFLAT HOSE	23
水带快速接头	CAMLOCK COUPLING(ALUMINIUM/PP)	24
其他接头和喉箍系列	OTHER COUPLINGS AND HOSE CLAMPS	25

## PVC塑筋管 PVC SUCTION HOSE



凸筋	C-TYPE	26
平筋	F-TYPE	27
塑筋管组套	A-TYPE	28
夹线塑筋管	PVC SUCTION & FIBER COMPOSITE HOSE	29

## 其他 OTHERS



TPU钢丝增强软管	TPU STEEL WIRE REINFORCED HOSE	30
橡塑管	PVC & RUBBER AIR HOSE	31
PVC双联管	PVC TWIN WELDING HOSE	32
生产设备	PVC HOSE PRODUCTION LINE	33
PVC耐化学品性一览表	PVC CHEMICAL TOLERANCE LIST	34





▶ **E**xperiments  
and Environment

原材料检测  
RAW MATERIAL TEST



成品检测  
PRODUCT TEST



剥离/拉伸强度测试  
Peel/Tensile strength test

规格测试  
Size test



耐老化测试  
Anti-uv test

压力测试  
Pressure test



# Certificates and Guarantee

## 证书 Certification



ISO 9001:2008

OHSAS 18001:1999

ISO 14001:2008

## 产品检测报告 Testing report



PAHS

ROHS

国标食品级

GB FOOD GRADE




REACH

FDA

欧洲食品级

EU FOOD GRADE

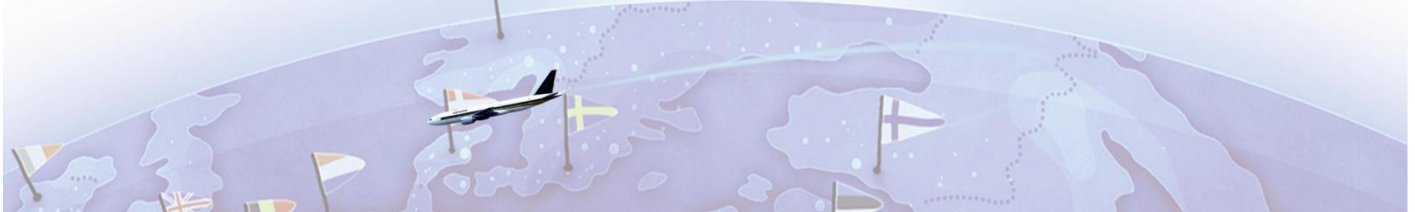



## 薄装

- 工业、农业和工程上抽吸送水、油、粉料。
- 内嵌钢丝骨架的PVC软管。
- 适用于普通压力环境。
- 高品质，低价格，性价比更高。
- 抗紫外线，防晒。




## LIGHT DUTY

- Used for drawing and conveying water, oil and powder in factory, agriculture.
- Spiral steel wire reinforced incorporated within the wall of flexible pvc tubing.
- Suitable for usual pressure environment.
- High-quality, low price, higher cost performance.
- Anti-uv.

1

STEEL

100% NEW PVC

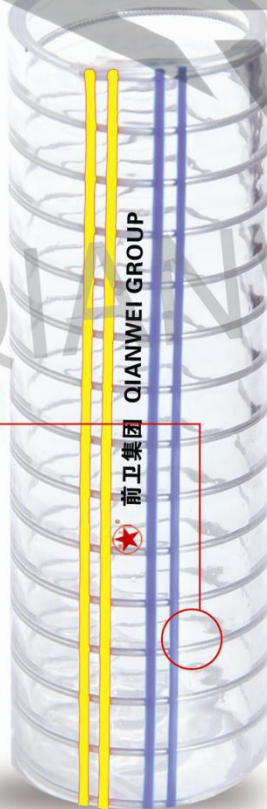

英制尺寸	公制尺寸		长度	最大工作压力 At 23°C		重量
	I.D.mm	O.D.mm		Bar	Bar	
3/8"	9	14	100	6	18	150
3/8"	10	15	100	6	18	160
1/2"	12	17	100	6	18	170
5/8"	15	21	100	6	18	250
3/4"	19	24	50	5	15	250
1"	25	29	50	4	12	220
1"	25	30	50	4	12	350
1-1/4"	32	36	50	3	9	400
1-1/4"	32	38	50	3	10	500
1-1/4"	32	39	50	3	10	600
1-1/2"	38	42	50	3	9	500
1-1/2"	38	44	50	3	9	600
1-1/2"	38	45	50	3	9	800
1-3/4"	45	50	50	3	9	600
1-3/4"	45	52	50	3	9	800
1-7/8"	48	54	50	3	9	800
1-7/8"	48	56	50	3	9	1000
2"	50	55.5	50	3	9	800
2"	50	57	50	3	9	1000
2"	50	60	50	3	9	1400
2-5/16"	58	65	30	2	6	1200
2-1/2"	64	72	30	2	6	1500
2-1/2"	64	75	30	2	6	2000
3"	76	84	30	2	6	1600
3"	76	87	30	2	6	2500
3-1/2"	90	102	20	2	6	3000
4"	102	112	20	2	6	2800
4"	102	113	20	2	6	3000

## 厚装


- 工业、农业和工程上抽吸送水、油、粉料。
- 可适用于高强度作业，如抽沙等。
- 耐候性佳、耐负压能力好、弯曲半径小，耐磨。
- 通过ROHS,PAHS等检测。
- 抗紫外线，防晒。




英制尺寸	公制尺寸		长度	最大工作压力 At 23°C		重量
	I.D.mm	O.D.mm		Bar	Bar	
1/4"	6	11	100	8	24	115
5/16"	8	14	100	8	24	150
3/8"	9	15	100	8	24	170
3/8"	10	16	100	8	24	200
1/2"	12	18	100	8	24	220
5/8"	15	22	50	6	18	300
3/4"	19	26	50	6	18	360
3/4"	20	26	50	6	18	320
7/8"	22	27	50	6	18	300
1"	25	33	50	5	16	540
1-1/4"	32	40	50	5	16	700
1-1/2"	38	48	50	5	15	1000
1-3/4"	45	56	50	5	15	1300
1-7/8"	48	59	50	5	15	1400
2"	50	62	50	5	15	1600
2-5/16"	58	69	40	4	12	1600
2-1/2"	64	78	30	4	12	2500
3"	76	90	30	4	12	3000
3-1/2"	90	108	20	4	12	4500
4"	102	116	20	4	12	4300
4-3/8"	110	123	20	3	9	4000
4-5/8"	117	133	10	3	9	5500
5"	127	143	10	3	9	6000
5-1/2"	140	156	10	3	9	6500
6"	152	170	10	2	6	8500
6-5/16"	160	176	10	2	6	8500
7"	180	196	10	2	6	8500
8"	200	224	10	2	6	12000
10"	254	286	10	2	6	20000

## HEAVY DUTY

- Used for drawing and conveying water, oil and powder in factory and agriculture.
- Suitable for high strength working environment like suction and discharge for sand.
- Good adaptability to hard weather condition and minus pressure, small bending radius, anti-abrasion.
- Passed the ROHS, PAHS test.
- Anti-uv.

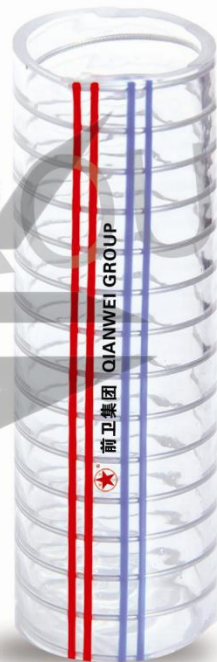

2

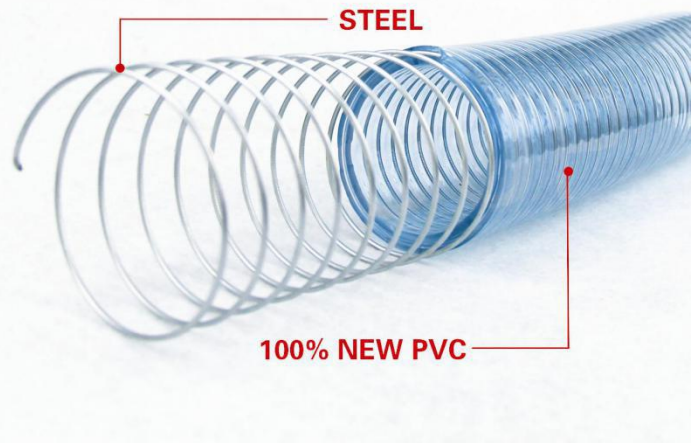



## 耐高温钢丝增强软管

- 高弹性、高强度镀锌金属丝，特殊PVC材料。
- 可在100℃下正常使用，适用于各类高温环境。

## HIGH-TEMPERATURE RESISTANT STEEL WIRE HOSE

- Hi-elasticity, Hi-strength zinc plated metal wire qualified special PVC synthesis materials.
- Used under 100°C condition, suitable for different high temperature environment.



英制尺寸	公制尺寸		长度	最大工作压力 MAX.W.P	最大爆破压力 MAX.B.P	重量
	At 23°C					
3/8"	10	16	100	8	24	200
1/2"	12	18	100	8	24	220
5/8"	15	22	50	6	18	300
3/4"	19	26	50	6	18	360
3/4"	20	26	50	6	18	320
7/8"	22	27	50	6	18	300
1"	25	33	50	5	16	540
1-1/4"	32	40	50	5	16	700
1-1/2"	38	48	50	5	15	1000
1-3/4"	45	56	50	5	15	1300
1-7/8"	48	59	50	5	15	1400
2"	50	62	50	5	15	1600
2-5/16"	58	69	40	4	12	1600
2-1/2"	64	78	30	4	12	2500
3"	76	90	30	4	12	3000
3-1/2"	90	108	20	4	12	4500
4"	102	116	20	4	12	4300

3




## 耐低温钢丝增强软管

- 高弹性、高强度镀锌金属丝，特殊改良PVC材料。
- 可在-40℃下保持良好的柔软性，适用于北方各类低温环境。

## LOW-TEMPERATURE RESISTANT STEEL WIRE HOSE

- Hi-elasticity, Hi-strength zinc plated metal wire, modified PVC and Silicon materials.
- Hose can maintain its good flexibility under the -40°C, suitable for different kinds of lower temperature environment, especially in north area.

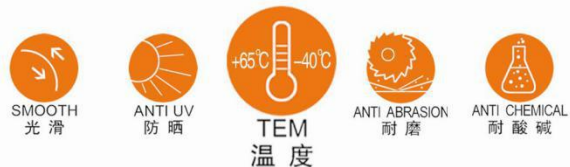

## 食品级钢丝增强软管


- 食品级符合美国FDA标准，通过了REACH和欧洲食品级检测，是输送牛奶、饮料、白酒、啤酒、果酱等食品的最佳软管。
- 可广泛用于食品、卫生行业。

## FOOD GRADE STEEL WIRE HOSE

- Food grade hose can be used to convey foods like milk, beverage, jam and liquor which meets the FDA standard and pass REACH and EU Food Grade test.
- Used for food industry and health care industry.



英制尺寸	公制尺寸		长度	最大工作压	最大爆破压	重量
	I.D.mm	O.D.mm		力 MAX.W.P	力 MAX.B.P	
				At23°C		
INCH	I.D.mm	O.D.mm	M/ROLL	Bar	Bar	g/m
1/4"	6	11	100	8	24	115
5/16"	8	14	100	8	24	150
3/8"	9	15	100	8	24	170
3/8"	10	16	100	8	24	200
1/2"	12	18	100	8	24	220
5/8"	15	22	50	6	18	300
3/4"	19	26	50	6	18	360
3/4"	20	26	50	6	18	320
7/8"	22	27	50	6	18	300
1"	25	33	50	5	16	540
1-1/4"	32	40	50	5	16	700
1-1/2"	38	48	50	5	15	1000
1-3/4"	45	56	50	5	15	1300
1-7/8"	48	59	50	5	15	1400
2"	50	62	50	5	15	1600
2-5/16"	58	69	40	4	12	1600
2-1/2"	64	78	30	4	12	2500
3"	76	90	30	4	12	3000
3-1/2"	90	108	20	4	12	4500
4"	102	116	20	4	12	4300

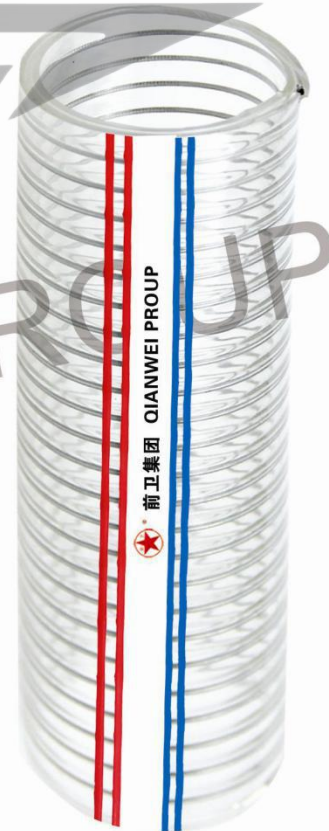




## 防静电钢丝增强软管 ANTI-STATIC STEEL WIRE HOSE

- 高弹性、高强度镀锌金属丝，优质PVC合成材料。
- 清晰透明的管体，柔韧性好，弯曲半径小。
- 耐高压，耐腐蚀、材料无毒性，使用寿命长。
- 在软管中植入铜线，用在容易发生静电的地方，防止由于静电而产生管内堵塞现象。
- 广泛应用于煤矿、化工等各类工厂。
- Made of Hi-elasticity Hi-strength zinc plated metal wire and high-quality PVC synthesis materials.
- The hose is clear and transparent with good flexibility and small bending radius.
- High-negative pressure resistant, high corrosion resistant, non-toxic and long life.
- Inserted the copper wire into the hose can avoid blockage of the internal flow because of the static electricity.
- Wildly used in mine, chemical plant and etc.



5

英制尺寸	公制尺寸		长度	最大工作压力 MAX.W.P	最大爆破压力 MAX.B.P	重量
	At 23°C					
1"	25	33	50	5	16	540
1-1/4"	32	40	50	5	16	700
1-1/2"	38	48	50	5	15	1000
1-3/4"	45	56	50	5	15	1300
1-7/8"	48	59	50	5	15	1400
2"	50	62	50	5	15	1600
2-5/16"	58	69	40	4	12	1600
2-1/2"	64	78	30	4	12	2500
3"	76	90	30	4	12	3000
3-1/2"	90	108	20	4	12	4500
4"	102	116	20	4	12	4300

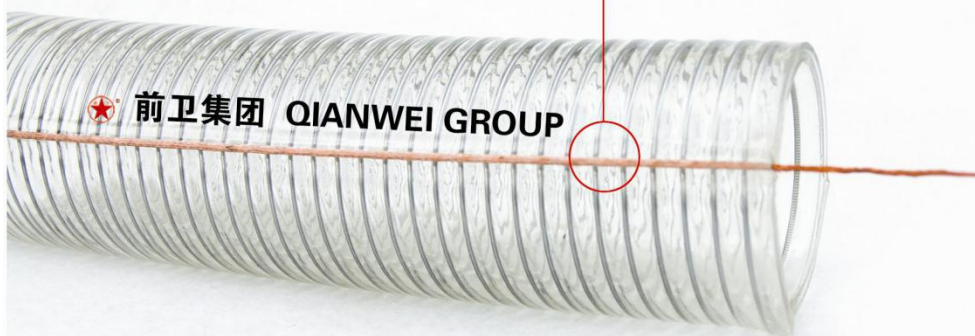


## PVC 钢丝纤维复合管

- 采用高强度纤维和优质镀锌弹簧钢丝做为加强材料，融合了PVC钢丝螺旋增强软管和PVC纤维增强软管的特点。
- 大大增强了产品的抗压性能，耐压可达到钢丝螺旋增强软管的2-4倍。
- 在软管中植入铜线，用在容易发生静电的地方，防止由于静电而产生管内堵塞现象。

## PVC STEEL & FIBER COMPOSITE HOSE

- Use high-strength fibers and high-quality galvanized spring steel wire as reinforcement.
- The pressure resistance was enhanced 2-4 times than the single spiral wire reinforced hose.
- Inserted the copper wire into the hose can avoid blockage of the internal flow because of the static electricity.

英制尺寸	公制尺寸		长度	最大工作压力 At 23°C		重量
	I.D.mm	O.D.mm		Bar	Bar	
1"	25	33	50	6	18	600
1-1/4"	32	41	50	5	15	800
1-1/2"	38	44	50	5	15	900
2"	50	60	50	5	15	1400
2.5"	64	75	40	4	12	1800
3"	75	88	40	4	12	2500
4"	102	116	30	4	12	4000

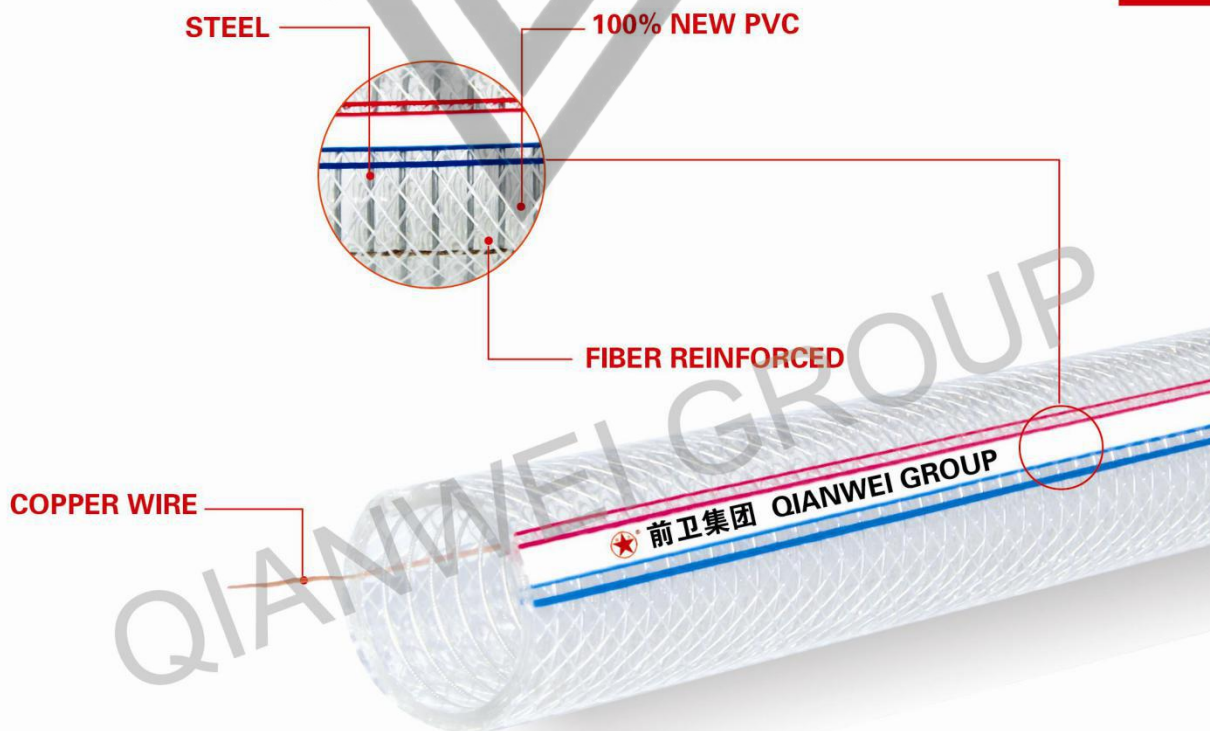



## 薄装

- 供应水和设备排水。
- 高品质，低价格，性价比更高。
- 适用于普通压力环境。
- 通过ROHS, PAHS等检测。
- 抗紫外线，防晒。




## LIGHT DUTY

- Supplying water & draining for equipment.
- High quality, low price, higher performance.
- Suitable for usual pressure environment.
- Passed the ROHS, PAHS test.
- Anti-uv.



英制尺寸	公制尺寸		长度	最大工作压力 力 MAX.W.P	最大爆破压力 力 MAX.B.P	重量
	I.D.mm	O.D.mm		At23°C		
5/32"	4	8	100	10	50	49
13/64"	5	9	100	10	30	57
1/4"	6	10	100	10	40	65
5/16"	8	12	100	10	40	82
3/8"	10	14	100	9	35	98
1/2"	12	16	50	7	20	115
1/2"	12	17	50	8	24	150
1/2"	13	17	50	7	20	125
5/8"	15	19	50	6	20	140
5/8"	16	20	50	6	20	150
5/8"	16	21	50	7	21	190
3/4"	19	23	50	4	12	170
3/4"	19	24	50	4	12	220
3/4"	20	24	50	4	12	180
7/8"	22	27	50	4	12	250
1"	25	29	50	3	9	220
1"	25	30	50	4	12	281
1-1/4"	32	38	40	3	10	430
1-1/2"	38	45	40	3	10	590
1-3/4"	45	55	30	3	10	1020
2"	50	59	30	3	10	1010

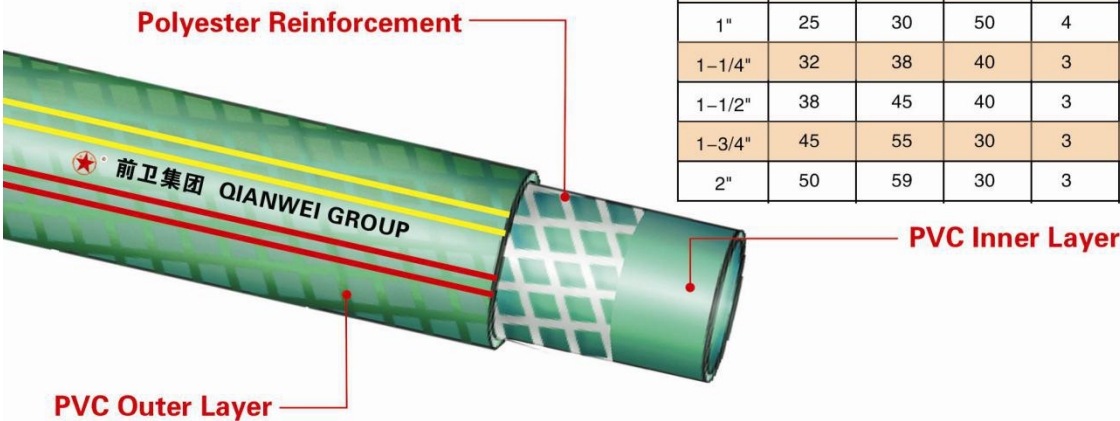

7

## 厚装


- 农业，工业供水，气，油等。
- 矿山，工程输送固体颗粒，纸浆等。
- 耐候性佳、耐耐压能力好、耐弯曲半径小，耐磨。
- 通过ROHS,PAHS等检测。
- 抗紫外线，防晒。



## HEAVY DUTY

- Supplying water, gas, oil in agriculture and industry.
- Conveying solid particles in mines, engineering etc.
- Good adaptability to hard weather condition and minus pressure, small bending radius, anti-abrasion.
- Passed the ROHS, PAHS test.
- Anti-uv.

英制尺寸	公制尺寸		长度	最大工作压力 At 23°C		重量
	I.D.mm	O.D.mm		Bar	Bar	
13/64"	5	10	100	12	40	76
1/4"	6	11	100	12	36	87
5/16"	8	13	100	10	30	105
3/8"	10	15	100	10	30	130
1/2"	12	18	100	9	27	185
5/8"	16	22	50	8	24	230
3/4"	19	25	50	6	18	270
7/8"	22	28	50	5	15	305
1"	25	31	50	5	15	340
1-1/4"	32	40	40	4	12	590
1-1/2"	38	46	40	4	12	690
1-3/4"	45	56	30	4	12	1140
2"	50	62	30	4	12	1380
2-1/2"	64	78	20	4	12	2030
3"	76	92	20	4	12	2750

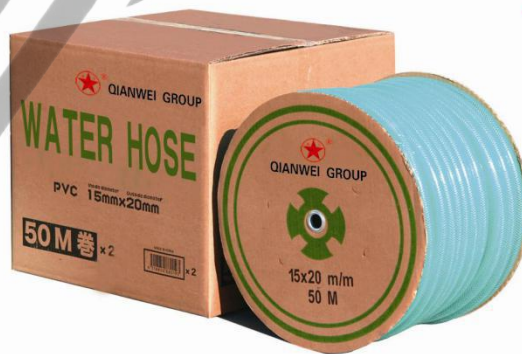

8





## 食品级纤维增强软管

- 食品级符合美国FDA标准，通过了REACH和欧洲食品级检测，是输送牛奶饮料、白酒、啤酒、果酱等食品的最佳软管。
- 可广泛用于食品、卫生行业。

## FOOD GRADE FIBER REINFORCED HOSE

- Food grade hose can be used for conveying milk, beverage, white wine, beer, jam and other food, which meets the FDA standard, and pass the REACH and Europe food grade test.
- Used for foodstuffs and sanitation Industry.



FOR FOOD  
食品级



ANTI UV  
防晒



TEM  
温度



ANTI ABRASION  
耐磨



ANTI CHEMICAL  
耐酸碱

FOOD GRADE PVC  
Inner Layer

Polyester Reinforcement

FOOD GRADE PVC  
Outer Layer

英制尺寸	公制尺寸		长度	最大工作压力 At 23°C		重量
	I.D.mm	O.D.mm		最大工作压力 MAX.W.P	最大爆破压力 MAX.B.P	
INCH			M/ROLL	Bar	Bar	g/m
1/4"	6	10	100	10	40	65
5/16"	8	12	100	10	40	82
3/8"	10	14	100	9	35	98
1/2"	12	16	50	7	20	115
1/2"	12	17	50	8	24	150
1/2"	13	17	50	7	20	125
5/8"	15	19	50	6	20	140
5/8"	16	20	50	6	20	150
5/8"	16	21	50	7	21	190
3/4"	19	23	50	4	12	170
3/4"	19	24	50	4	12	220
3/4"	20	24	50	4	12	180
7/8"	22	27	50	4	12	250
1"	25	29	50	3	9	220
1"	25	30	50	4	12	281
1-1/4"	32	38	40	3	10	430
1-1/2"	38	45	40	3	10	590
1-3/4"	45	55	30	3	10	1020
2"	50	59	30	3	10	1010

## 空气管

## AIR HOSE

- 用于一般工业工程的气体生产设备。
- 用于在汽车修理厂和服务站输送压缩气体。
- 用于自动化机械和加油站设备。
- 气动装备、射钉枪。
- 可用于消防。
- 通过ROHS,PAHS等检测。
- 抗紫外线，防晒。
- Generally used for air production equipment.
- Transfer compressed gas in garages and service stations.
- Used for automatic machines and gas station equipment.
- Used with pneumatic equipment and nail guns.
- Used for fire fighting.
- Passed the ROHS, PAHS test.
- Anti-UV.



英制尺寸	公制尺寸		长度	最大工作压力 力 MAX.W.P		最大爆破压力 力 MAX.B.P	重量
	I.D.mm	O.D.mm		At23℃			
1/4"	6.5	12	100	20	80	100	
1/4"	6.5	12.5	100	30	95	115	
5/16"	8.5	14	100	20	80	130	
5/16"	8.5	14.5	100	30	90	140	
3/8"	10	16	100	20	80	160	
1/2"	13	20	50	20	75	240	
5/8"	16	25	50	20	60	380	
3/4"	19	28.5	50	20	50	460	
1"	25	34.5	50	15	45	580	
1-1/4"	32	44	40	15	45	940	
1-1/2"	38	50	40	15	40	1085	
2"	50	64	40	15	30	1640	

10

## 铜配件 BRASS FITTINGS



规格(Size) Φ8 Φ8.5 Φ9 Φ10





## 特制气压软管（5层）

- 采用先进技术，利用绿色环保材料和高强度涤纶线加工而成。
- 弹性好，耐磨，耐化学成分可适应不同的环境。
- 便于移动和操作，耐高压。
- 抗紫外线，防晒。
- 通过ROHS,PAHS等检测。



## SPECIALIZED AIR HOSE

- Adopt the advance new technology, made of the eco-friendly material and high tensility of polyester yarn.
- Good flexibility, durability against climate, high abrasion resistance and chemical resistance.
- Easy to handle, high pressure resistance.
- Anti-uv.
- Passed the ROHS, PAHS test.

11



英制尺寸	公制尺寸		长度	最大工作压	最大爆破压	重量
	I.D.mm	O.D.mm		力 MAX.W.P	力 MAX.B.P	
INCH			M/ROLL	At23℃		g/m
1/4"	6.5	13.5	100	40	160	142
5/16"	8.5	15.5	100	40	150	172
3/8"	9.5	16.5	100	40	120	185
3/8"	10	17	50	40	120	190
1/2"	12	20	50	30	100	260
5/8"	16	26	50	30	85	428
3/4"	19	29	50	25	75	490
1"	25	35	50	25	60	610



英制尺寸	公制尺寸		长度	最大工作压力 MAX.W.P	最大爆破压力 MAX.B.P	重量
	I.D.mm	O.D.mm		At23°C		
INCH	I.D.mm	O.D.mm	M/ROLL	Bar	Bar	g/m
13/64"	5	10	100	12	40	76
1/4"	6	11	100	12	36	87
5/16"	8	13	100	10	30	105
3/8"	10	15	100	10	30	130
1/2"	12	18	100	9	27	185
5/8"	16	22	50	8	24	230
3/4"	19	25	50	6	18	270
7/8"	22	28	50	5	15	305
1"	25	31	50	5	15	340
1-1/4"	32	40	40	4	12	590
1-1/2"	38	46	40	4	12	690
1-3/4"	45	56	30	4	12	1140
2"	50	62	30	4	12	1380
2-1/2"	64	78	20	4	12	2030
3"	76	92	20	4	12	2750

## 耐高温纤维增强软管

- 采用特殊PVC材料和高强度纤维线合制而成。
- 可在100°C下正常使用，适用于各类高温环境。

## HIGH-TEMPERATURE RESISTANT FIBER REINFORCED HOSE

- Made of special PVC material and high strength fiber.
- Used under 100°C condition, suitable for different high temperature environments.




## 耐低温纤维增强软管

- 采用特殊PVC材料和高强度纤维线合制而成。
- 可在-40°C下正常使用，适用于各类低温环境。

## LOW-TEMPERATURE RESISTANT FIBER REINFORCED HOSE

- Made of special PVC material and high strength fiber.
- Used under -40°C condition, suitable for different kinds of low temperature environments.

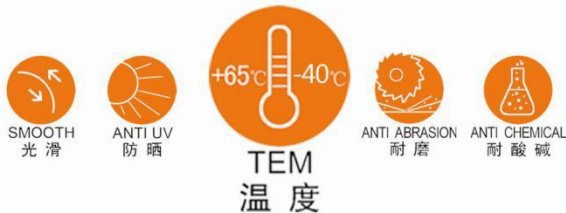



## 透明管

- 采用全新无毒PVC材料, 可达到ROHS、REACH、FDA标准, 通过了PAHS检测。
- 柔软, 质量轻、耐磨、耐热。
- 抗UV。
- 弹性好, 压扁后也可恢复原来形状。



## TRANSPARENT HOSE

- Made of non-toxic ingredients conforming to ROHS、REACH、FDA standards, passed the PAHS test.
- Flexible, light weight, anti-abrasion, heat resistant.
- Anti-uv.
- Can be restored to original shape even if squashed.

英制尺寸	公制尺寸		长度	最大工作压力 MAX.W.P	最大爆破压力 MAX.B.P	重量
	I.D.mm	O.D.mm		At23°C		
INCH	I.D.mm	O.D.mm	M/ROLL	Bar	Bar	g/m
1/8"	3	5	100	2	6	16
5/32"	4	6	100	2	6	20
3/16"	5	7	100	2	6	25
1/4"	6	8	100	1.5	5	28.5
5/16"	8	10	100	1.5	5	37
3/8"	10	12	100	1.5	4	45
1/2"	12	15	50	1.5	4	83
5/8"	15	18	50	1	3	101
3/4"	19	22	50	1	3	125
1"	25	29	50	1	3	220
1-1/4"	32	38	40	1	3	430
1-1/2"	38	44	40	1	3	500
2"	50	58	40	1	2.5	880

13

## 煤气管

- 适用于较低压力下的气、液体输送, 尤其适用于家居煤气输送。质轻柔软富有弹性, 密封性好。

## LPG HOSE (GAS HOSE)

- Supplying low pressure water, oil, gas etc in agriculture and industry. Especially for supplying LPG in household. High flexibility, light weight and easy to handle.

英制尺寸	公制尺寸		长度	最大工作压力 MAX.W.P	最大爆破压力 MAX.B.P	重量
	I.D.mm	O.D.mm		At23°C		
INCH	I.D.mm	O.D.mm	M/ROLL	Bar	Bar	g/m
3/8"	9	15	100	2	6	147
1/2"	13	20	100	2	6	236



TEMP  
温度



ANTI UV  
防晒



ANTI CHEMICAL  
耐酸碱



FLEXIBILITY  
柔软有弹性

## 花园管

- 园林浇灌，清洗牛棚，公园，社区。
- 浇灌花及树木。
- 洗车水管。
- 通过ROHS, PAHS等检测。
- 抗紫外线，防晒。

## GARDEN HOSE

- Gardening , cleaning barns , parks, community.
- Irrigation flower garden and trees.
- Used for washing car.
- Passed the ROHS,PAHS test.
- Anti-uv.



ANTI UV  
防晒



TEM  
温度



ANTI ABRASION  
耐磨




ANTI CHEMICAL  
耐酸碱



FLEXIBILITY  
柔软 有弹性

英制尺寸	公制尺寸		长度	最大工作压力 MAX.W.P	最大爆破压力 MAX.B.P	重量
	I.D.mm	O.D.mm		At 23°C		
INCH	I.D.mm	O.D.mm	M/ROLL	Bar	Bar	g/m
1/2"	12	15.4	30	5	15	90
1/2"	12	16	30	7	21	120
5/8"	15	19	30	5	15	145
5/8"	15	20	30	6	18	185
3/4"	19	23	30	4	12	178
3/4"	19	24	30	5	15	228
1"	25	29	30	3	9	229
1"	25	30	30	4	12	291

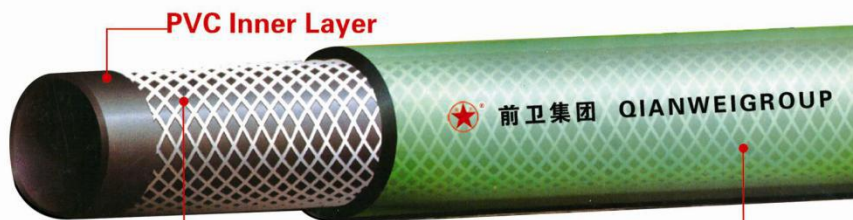

Polyester Reinforcement

PVC Outer Layer



## 特制花园管 (4层)


- 采用先进技术, 利用绿色环保材料和高强度涤纶线加工而成。
- 弹性好, 耐磨, 耐化学成分可适应不同的环境。
- 便于移动和操作, 耐高压。
- 抗紫外线, 防晒。
- 通过ROHS, PAHS等检测。



## SPECIALIZED GARDEN HOSE

- Adopt the advance new technology, made of the eco-friendly material and high tensivity of polyester yarn.
- Good flexibility, druably against climate, high abrasion resistance and chemical resistance.
- Easy handle, high pressure resistance.
- Anti-uv.
- Passed the ROHS, PAHS test.

15

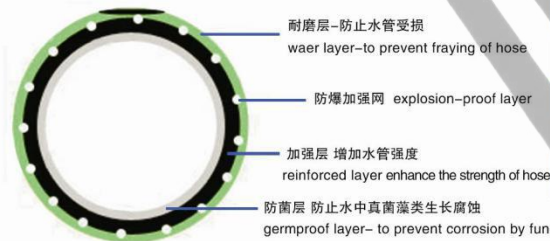

英制尺寸	公制尺寸		长度	最大工作压	最大爆破压	重量
	I.D.mm	O.D.mm		力 MAX.W.P	力 MAX.B.P	
1/2"	12	16.4	30	7	21	130
1/2"	12	17	15	8	24	148
1/2"	12	17	30	8	24	148
5/8"	15	20	30	6	18	180
5/8"	15	21	30	7	21	220
3/4"	19	25	30	6	18	270
3/4"	19	26	30	6	20	320
1"	25	31	30	5	15	350



## 防扭曲钩编管

- 适用于不同情况的花园浇灌、洗车、以及日常冲洗。
- 三层，由优质材料和涤纶线加工而成。
- 特殊设计纤维层，采用钩编工艺，防扭曲。
- 颜色多样。
- 弹性好，抗UV。

## ANTI-TORSION PVC HOSE

- For garden irrigation, vehicle washing and daily washing.
- Three layers, made of top-quality material and polyester.
- Specialized design on reinforcement with knitted polyester, anti-torsion.
- Available in multiple colors.
- Flexible, Anti-uv.



英制尺寸	公制尺寸		长度	最大工作压力 MAX.W.P	最大爆破压力 MAX.B.P	重量
	I.D.mm	O.D.mm		At 23°C		
1/4"	6	10	100	10	40	66
5/16"	8	12	100	10	40	82
3/8"	10	14	100	9	35	100
1/2"	12	16	100	7	20	115
5/8"	15	19	100	6	20	140
3/4"	19	24	50	4	12	170
7/8"	22	27	50	4	12	250
1"	25	30	50	4	12	281
1-1/4"	32	38	50	4	12	430
1-1/2"	38	45	50	3	10	590
2"	50	59	50	3	10	1010






## 扁平线管


- 可用于园林浇灌。
- 洗车用水管。
- 耐候性佳、质轻。
- 体积更小，更便于携带。
- 抗紫外线，防晒。

## PVC FLAT REINFORCED HOSE

- Gardening, cleaning barns, parks, community.
- Used for washing car.
- Good adaptability to hard weather condition.
- Smaller volume, light weight and easy to handle.
- Anti-uv.

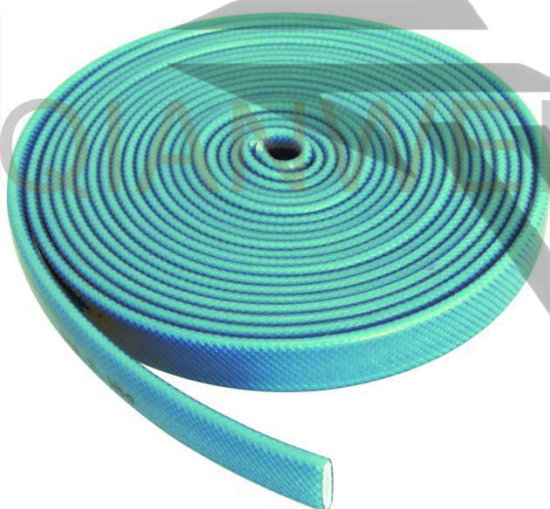

英制尺寸	公制尺寸		长度	最大工作压力 MAX.W.P	最大爆破压力 MAX.B.P	重量
	I.D.mm	O.D.mm		At 23°C		
INCH	I.D.mm	O.D.mm	M/ROLL	Bar	Bar	g/m
5/32"	4	8	100	10	50	49
13/64"	5	9	100	10	30	57
1/4"	6	10	100	10	40	65
5/16"	8	12	100	10	40	82
3/8"	10	14	100	9	35	98
1/2"	12	16	50	7	20	115
1/2"	12	17	50	8	24	150
1/2"	13	17	50	7	20	125
5/8"	15	19	50	6	20	140
5/8"	16	20	50	6	20	150
5/8"	16	21	50	7	21	190
3/4"	19	23	50	4	12	170
3/4"	19	24	50	4	12	220
3/4"	20	24	50	4	12	180
7/8"	22	27	50	4	12	250
1"	25	29	50	3	9	220
1"	25	30	50	4	12	281
1-1/4"	32	38	40	3	10	430
1-1/2"	38	45	40	3	10	590
1-3/4"	45	55	30	3	10	1020
2"	50	59	30	3	10	1010

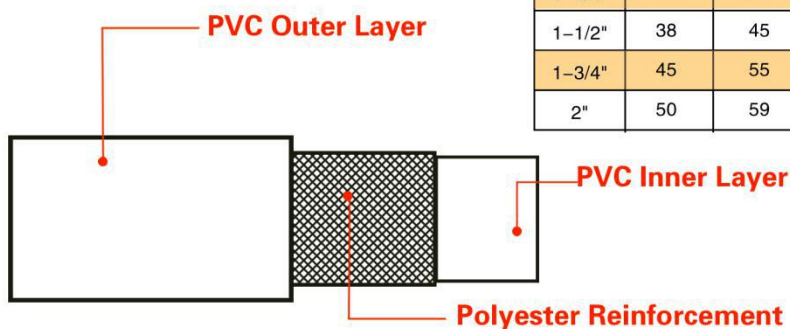

## 水枪套装

## HOSE NOZZLE SET



➔ QW601  
四件套水枪  
4PCS HOSE NOZZLE SET  
规格 (SIZE): 1/2" 5/8" 3/4"



➔ QW603  
5功能塑料水枪套装  
5PATTERN HOSE NOZZLE SET  
规格 (SIZE): 1/2" 5/8" 3/4"



➔ QW606  
3功能金属水枪套装  
METAL 3WAY HOSE  
NOZZLE SET  
规格 (SIZE): 1/2" 5/8" 3/4"



➔ QW607  
3功能塑料水枪套装  
3PATTERN HOSE NOZZLE SET  
规格 (SIZE): 1/2" 5/8" 3/4"

## 铜配件 BRASS FITTINGS



➔ QW608  
适配器 TAP ADAPTOR  
规格 (size): 1/2"—3/4"



➔ QW609  
止水接 HOSE CONNECTOR (STOP)  
规格 (size): 1/2"



➔ QW610  
通水接 HOSE CONNECTOR  
规格 (size): 1/2"



➔ QW611  
规格 (size): 1/2"、5/8"、3/4"



➔ QW612  
规格 (size): 1/2"、5/8"、3/4"



➔ QW613  
规格 (size): 1/2"、5/8"、3/4"

## 万能接 UNIVERSAL TAP ADAPTOR



➔ QW701



➔ QW702




## 超轻型(2/3BAR)

- 用于农业灌溉。
- 采用工业涤纶长丝和优质PVC，一次挤出成型。
- 耐老化、无味，使用寿命长。
- 重量更轻，方便搬运和贮存。
- 抗紫外线，防晒。

## SUPER LIGHT DUTY (2/3BAR)

- Used for agriculture
- Made from high strength polyester and high quality pvc, once-molded by extruder plastic
- Anti-aging, no smelling, long life
- Lighter weight, easy to handle and store
- Anti-uv

尺寸		长度	最大工作压 力 MAX.W.P	最大爆破压 力 MAX.B.P	重量
英制尺寸	公制尺寸		At23°C		
INCH	mm	M/ROLL	Bar	Bar	g/m
2"	51	100	2	8	190
3"	76	100	2	8	280
4"	103	100	2	8	430

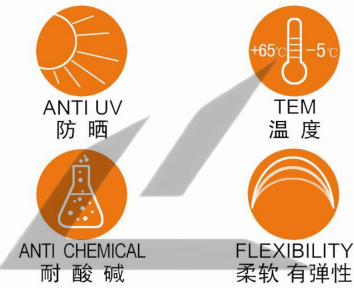

19



## 轻型(4BAR)

- 用于农林灌溉，工业领域液体传输。
- 一次挤出成型。壁薄、重量轻、压力高。
- 耐酸碱，抗老化。
- 环保级水带可通过REACH检测标准。
- 适用于喷灌系统。
- 抗紫外线，防晒。

## LIGHT DUTY (4BAR)

- Irrigation in agriculture and transfer liquid in industry.
- Once-molded by extruder plastic .Small thickness, light weight,high pressure resistance.
- Anti-chemical,anti-aging.
- Environmental grade hose can meet REACH standard.
- Suitable for drip irrigation system.
- Anti-uv.



ANTI UV  
防晒



TEM  
温度



ANTI ABRASION  
耐磨




ANTI CHEMICAL  
耐酸碱




FLEXIBILITY  
柔软有弹性

英制尺寸	公制尺寸		长度	最大工作压力 MAX.W.P	最大爆破压力 MAX.B.P	重量
	内径	壁厚		At23°C		
INCH	I.D.mm	mm	M/ROLL	Bar	Bar	g/m
1"	25	1.3	100	4	15	150
1-1/4"	32	1.2	100	4	15	170
1-1/2"	38	1.2	100	4	15	190
2"	51	1	100	4	12	220
2.5"	64	1.1	100	4	12	300
3"	76	1.1	100	4	12	360
4"	103	1.25	100	4	12	550
5"	127	1.35	100	3.5	10	750
6"	153	1.35	100	3	9	900
8"	203	2	100	3	9	1600
10"	255	2.4	100	2.5	7	2600
12"	305	2.35	100	2	6	3000
14"	358	3	50	2	6	5000
16"	408	3	50	2	6	6000

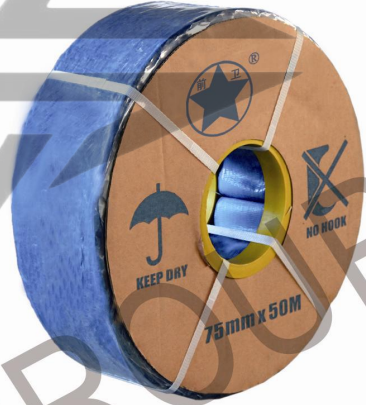

20

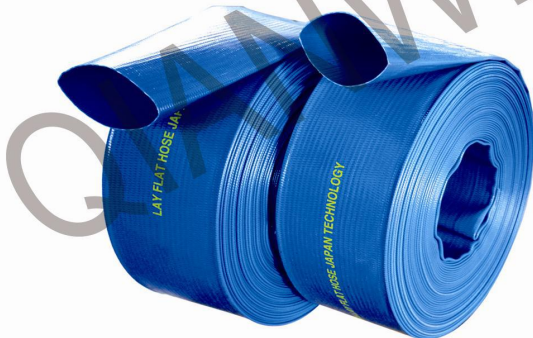



## 中型(6BAR)

- 用于农林灌溉，工业领域液体传输。
- 压力更高。
- 耐磨性好。
- 环保级水带可通过REACH检测标准。

适用于喷灌系统。

- 抗紫外线，防晒。

## MEDIUM DUTY(6BAR)

- Use for irrigation in agriculture and transfer liquid in industry.
- Higher pressure resistance.
- Good abrasion resistance.
- Environmental grade hose can meet REACH standard.
- Suitable for drip irrigation system.
- Anti-uv.



21



英制尺寸	公制尺寸		长度	最大工作压力	最大爆破压力	重量
	内径	壁厚		At23°C	At23°C	
INCH	I.D.mm	mm	M/ROLL	Bar	Bar	g/m
3/4"	20	1.35	100	6	21	110
1"	25	1.3	100	6	21	160
1-1/4"	32	1.2	100	6	21	190
1-1/2"	38	1.2	100	6	21	220
1-1/2"	40	1.4	100	6	18	225
2"	51	1.35	100	6	18	300
2.5"	64	1.55	100	6	18	430
3"	76	1.5	100	6	18	500
4"	103	1.9	100	6	18	800
5"	127	2	100	6	18	1080
6"	153	2.4	100	6	18	1600
8"	203	2.6	100	5	15	2200



ANTI UV  
防晒



TEM  
温度



ANTI ABRASION  
耐磨



ANTI CHEMICAL  
耐酸碱



FLEXIBILITY  
柔软有弹性

## 重型(8/10BAR)

- 农业，建筑业，工业，采矿和海洋行业等排泥。
- 采用特殊加工的高强度涤纶工业长丝编织，压力高。
- 适用于喷灌系统。
- 抗紫外线，防晒。



ANTI UV  
防晒



TEM  
温度



ANTI ABRASION  
耐磨



ANTI CHEMICAL  
耐酸碱



FLEXIBILITY  
柔软有弹性

## HEAVY DUTY (8/10BAR)

- Discharge sludge in agriculture, construction, industry, mining and marine service etc.
- Reinforced with specialized industrial polyester yarn, High pressure resistance.
- Suitable for drip irrigation system.
- Anti-uv.

英制尺寸	公制尺寸		长度	最大工作压力 MAX.W.P	最大爆破压力 MAX.B.P	重量
	内径	壁厚		At23°C		
INCH	I.D.mm	mm	M/ROLL	Bar	Bar	g/m
3/4"	20	1.55	50	10	30	140
1"	25	1.8	50	10	30	200
1-1/4"	32	1.5	50	10	30	210
1-1/2"	38	1.7	50	10	30	290
1-1/2"	40	1.9	50	10	30	300
1-4/3"	45	2	50	10	30	350
2"	51	1.55	50	8	24	350
2"	51	1.8	50	10	30	420
2.5"	64	1.9	50	10	30	700
3"	76	2	50	8	24	660
3"	76	2.55	50	10	30	850
4"	103	2.25	50	8	24	1000
4"	103	2.7	50	10	30	1200
6"	153	3	50	8	24	2000
8"	203	3.2	50	6	18	2800





## QFLEX 输水带

- 采用新型材料，外观颜色多，亮度高，拉伸力强。
- 在同等压力的情况下，重量比PVC材质轻30%，便于搬运。
- 比PVC材质更加环保，可用于食品输送
- 比PVC材质更加耐酸碱，抗老化
- 适用于喷灌系统。
- 抗紫外线，防晒。



## QFLEX LAYFLAT HOSE

- Use new material,colorful appearance,high brightness and high tensile strength.
- 30% lighter than PVC in same working pressure, easy to move.
- More environmental than PVC, can be used to convey food.
- Better chemical resistance and aging resistance than PVC.
- Suitable for drip irrigation system.
- Anti-uv.

23



英制尺寸	公制尺寸		长度	最大工作压力 MAX.W.P	最大爆破压力 MAX.B.P	重量
	内径	壁厚		At23°C		
INCH	I.D.mm	mm	M/ROLL	Bar	Bar	g/m
1"	25	1.3	100	4	15	110
1-1/4"	32	1.2	100	4	15	130
1-1/2"	38	1.2	100	4	15	150
2"	51	1	100	4	12	180
2.5"	64	1.1	100	4	12	220
3"	76	1.1	100	4	12	270
4"	103	1.25	100	4	12	400
5"	127	1.35	100	3.5	10	550
6"	153	1.35	100	3	9	660
8"	203	2	100	3	9	1150



ANTI UV  
防晒



TEM  
温度



ANTI ABRASION  
耐磨



ANTI CHEMICAL  
耐酸碱



FLEXIBILITY  
柔软有弹性

## 铝配件 ALUMINUM FITTING

Size 1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3" 4" 5" 6" 8"



Type A  
Male Adapter X Female



Type B  
Female Coupler X Male



Type C  
Female Coupler X Hose Shank




Type D  
Female Coupler X Female



Type E  
Male Adapter X Hose Shank



Type F  
Male Adapter X Male



Type DC  
Dust Cap



Type DP  
Dust Plug

## 尼龙/PP配件 NYLON /PP FITTING

Size 1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3" 4"



Type A  
Male Adapter X Female



Type B  
Female Coupler X Male



Type C  
Female Coupler X Hose Shank



Type D  
Female Coupler X Female



Type E  
Male Adapter X Hose Shank



Type F  
Male Adapter X Male




Type DC  
Dust Cap



Type DP  
Dust Plug



## 水带配件

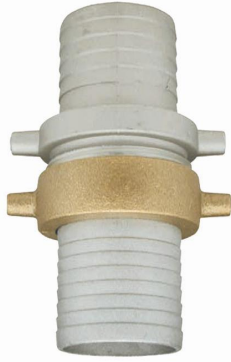

凸耳接头/美式接扣  
Pin Lug Couplings

Aluminium With Brass Nut	ALL Brass
Size	Size
3/4 "	1-1/2 "
1 "	2 "
1-1/4 "	2-1/2 "
1-1/2 "	
2 "	
2-1/2 "	
3 "	
4 "	
6 "	



Hose Menders

ALL Brass
Size
1/2 "
3/4 "
1 "
1-1/4 "
1-1/2 "
2 "
2-1/2 "
3 "
4 "
5 "
6 "
8 "

25



德式喉箍  
Germany Type Hose Clamp



美式喉箍  
American Type Hose Clamp



欧式单头强力喉箍  
European Type Hose Clamp



抽带式卡箍  
Center Punch Clamps

## 凸筋

- 由优质PVC和高强度PVC筋制成。
- 凸起的外层让水管弹性好，弯曲半径小。
- 平滑的内层便于输送液体、气体和粉尘。
- 耐磨。

## C-TYPE



- Made of quality pvc reinforced with an integral helix of rigid PVC.
- Corrugated outer surface provide high flexibility and small bending radius.
- Smooth inner surface are excellent for conveying liquid,air,powders.
- High abrasion resistant.

### 薄装 LIGHT DUTY

英制尺寸	公制尺寸		长度	最大工作压 力 MAX.W.P	最大爆破压 力 MAX.B.P	重量
				At23°C		
INCH	I.D.mm	O.D.mm	M/ROLL	Bar	Bar	g/m
3/4"	19	23	30	6	18	230
1"	25	29	30	6	18	290
1-1/4"	32	36	30	6	18	350
1-1/4"	32	38	30	6	18	400
1-1/2"	38	44	30	6	18	550
1-1/2"	38	46	30	6	18	650
2"	50	54	30	5	15	550
2"	50	56	30	5	15	700
2-1/2"	63	69	30	4	12	880
2-1/2"	63	71	30	4	12	1170
3"	75	81	30	3	9	1160
3"	75	83	30	3	9	1300
4	100	108	30	3	9	1950
4	100	110	30	3	9	2300
5	125	135	20	3	9	3000
5	125	137	20	3	9	3300
6	152	164	10	2	6	4500
6	152	166	10	2	6	5500
8	200	214	10	2	6	6300

### 厚装 HEAVY DUTY

英制尺寸	公制尺寸		长度	最大工作压 力 MAX.W.P	最大爆破压 力 MAX.B.P	重量
				At23°C		
INCH	I.D.mm	O.D.mm	M/ROLL	Bar	Bar	g/m
3/4"	19	25	30	8	24	280
1"	25	31	30	8	24	350
1-1/4"	32	40	30	8	24	500
1-1/2"	38	48	30	8	24	750
2"	50	58	30	7	21	920
2"	50	60	30	7	21	1050
2-1/2"	63	73	30	6	18	1300
3"	75	85	30	5	15	1650
3"	75	87	30	5	15	1900
4	100	112	30	5	15	2900
4	100	114	30	5	15	3200
4	100	116	30	6	18	3700
5	125	139	20	4	12	3600
5	125	141	20	4	12	4000
6	152	170	10	4	12	7200
6	152	174	10	5	15	8000
8	200	216	10	3	9	6700

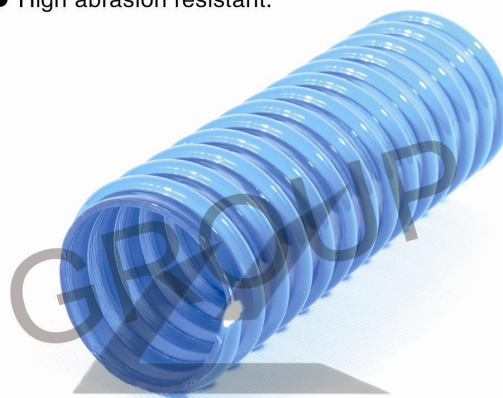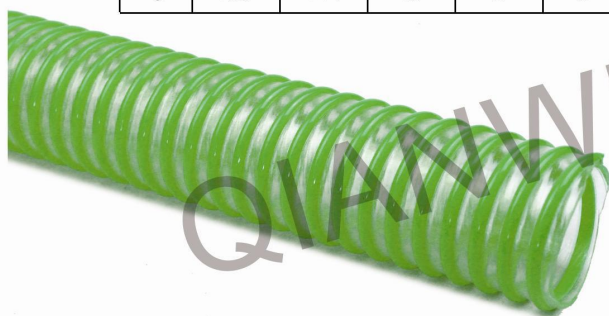



## 平筋

- 内外层光滑。
- 广泛应用于工农业上抽水和吸水。
- 输送液体、粉尘。
- 良好的耐腐蚀性，可用于保护电缆和管道。
- 弹性好，重量轻，弯曲半径小。

## F-TYPE

- Smooth inner and outer surface.
- Extensively used in industry and agriculture for pumping and transferring needs.
- Suitable for conveying liquid, powder.
- Excellent corrosion-proof protection for cable conduit and piping.
- Excellent flexibility, light weight and small bending radius.


### 薄装 LIGHT DUTY

英制尺寸	公制尺寸		长度	最大工作压 力 MAX.W.P	最大爆破压 力 MAX.B.P	重量
	At23°C			Bar	Bar	
INCH	I.D.mm	O.D.mm	M/ROLL	Bar	Bar	g/m
3/4"	19	23	30	6	18	230
1"	25	29	30	6	18	290
1-1/4"	32	36	30	6	18	350
1-1/4"	32	38	30	6	18	400
1-1/2"	38	44	30	6	18	550
1-1/2"	38	46	30	6	18	650
2"	50	54	30	5	15	550
2"	50	56	30	5	15	700
2-1/2"	63	69	30	4	12	880
2-1/2"	63	71	30	4	12	1170
3"	75	81	30	3	9	1160
3"	75	83	30	3	9	1300
4	100	108	30	3	9	1950
4	100	110	30	3	9	2300
5	125	135	20	3	9	3000
5	125	137	20	3	9	3300
6	152	164	10	2	6	4500
6	152	166	10	2	6	5500
8	200	214	10	2	6	6300



### 厚装 HEAVY DUTY

英制尺寸	公制尺寸		长度	最大工作压 力 MAX.W.P	最大爆破压 力 MAX.B.P	重量
	At23°C			Bar	Bar	
INCH	I.D.mm	O.D.mm	M/ROLL	Bar	Bar	g/m
3/4"	19	25	30	8	24	280
1"	25	31	30	8	24	350
1-1/4"	32	40	30	8	24	500
1-1/2"	38	48	30	8	24	750
2"	50	58	30	7	21	920
2"	50	60	30	7	21	1050
2-1/2"	63	73	30	6	18	1300
3"	75	85	30	5	15	1650
3"	75	87	30	5	15	1900
4	100	112	30	5	15	2900
4	100	114	30	5	15	3200
4	100	116	30	6	18	3700
5	125	139	20	4	12	3600
5	125	141	20	4	12	4000
6	152	170	10	4	12	7200
6	152	174	10	5	15	8000
8	200	216	10	3	9	6700

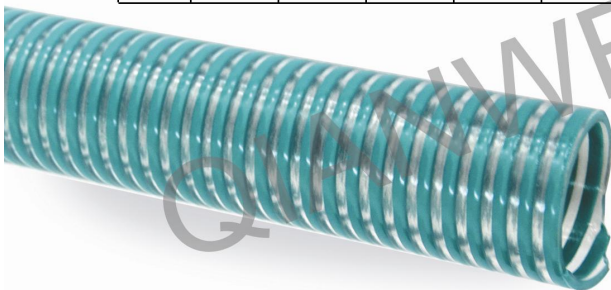

## 塑筋管组套

- 配有塑料接头，可以直接使用。
- 塑料接头与管体融为一体，可以避免出现漏水等情况的发生。
- 柔软、有弹性，自如弯曲。
- 可适用于排水系统，建筑、矿业排水以及农业。
- 也可用于吸收粉尘、真空吸尘以及游泳池清洗。



## A-TYPE

- Offer with plastic connectors, can be used directly.
- The combining of connectors and hose to prevent leaking.
- Flexible,soft,bend naturally.
- Suitable for drainage water system in agrilculture, construction,mining and irrigation purposes.
- Also used for dust collection,vaccum cleaner,swimming pool cleaning.

英制尺寸	公制尺寸		最大工作压 力 MAX.W.P	最大爆破压 力 MAX.B.P	重量
			At23°C		
INCH	I.D. mm	O.D. mm	Bar	Bar	g/m
2"	50.6 ± 1	59 ± 1.5	2.5	9	630
3"	76 ± 1	88 ± 1.5	2	8	1300
4"	102 ± 1.5	117 ± 2	1.5	6	2300

28

水管可选长度(Hose length available in)

3Meter(10ft),4.5Meter(15ft) ,6Meter(20ft),7.5Meter(25ft),9Meter(30ft)






## PVC夹线塑筋管

- 采用高强度纤维作为加强材料，融合了PVC塑筋管和PVC纤维增强软管的特点。
- 柔软有弹性。
- 无毒，可用于工农业输送水、油、粉尘等，也可用于输送红酒、果汁等饮料。
- 抗压、耐候性好。

## PVC SUCTION & FIBER COMPOSITE HOSE

- Use high-strength fibers as reinforcement. Combine the features of suction hose & fiber hose.
- Soft and flexible.
- Non-toxic, used for conveying water, oil, powder, also can be used for conveying wine, juice etc.
- Crushing abrasion and weather resistance.

英制尺寸	公制尺寸		长度	最大工作压力 MAX.W.P	最大爆破压力 MAX.B.P	重量
	I.D.mm	O.D.mm		At23°C		
INCH	I.D.mm	O.D.mm	M/ROLL	Bar	Bar	g/m
2"	50	60	30	8	24	1000
2-1/2"	63	74	30	7	21	1400
3"	75	86	30	6	18	1700
4"	102	111	30	6	18	2500
5"	125	143	20	5	15	4400
6"	152	168	10	5	15	5800
8"	200	216	10	4	12	8500

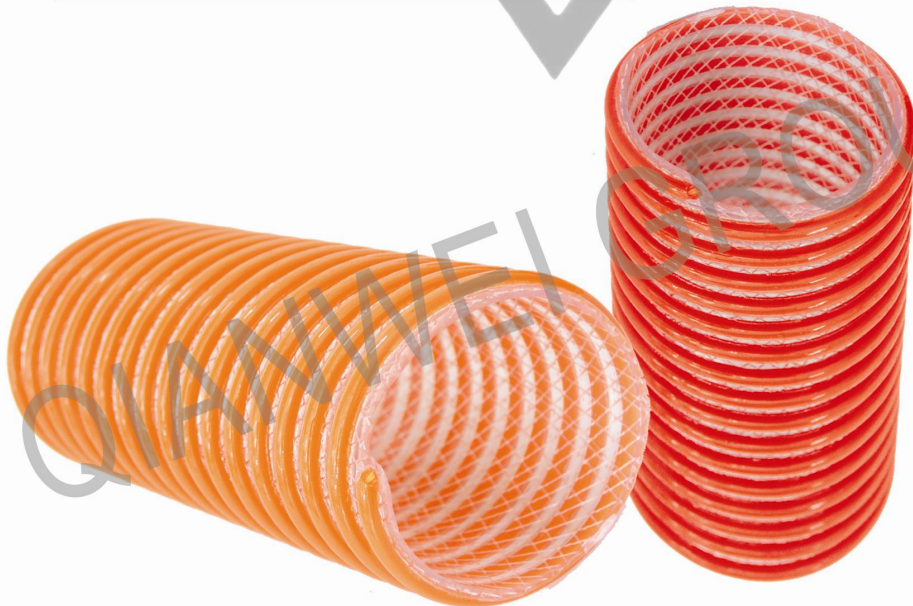

## TPU钢丝增强管

- 工业、农业、渔业、建筑及家居等行业中各种设备的供水、气、油配套软管。
- 可用于食品行业，输送牛奶饮料，啤酒，果酱等，通过了食品级检测。
- 是PVC、橡胶软管的最佳替代品。
- 采用TPU材料，内嵌高强度钢丝骨架。
- 外表透明光滑，高耐磨、高弹性、耐撕裂、耐压、耐油，弯曲半径小。
- 耐低温耐候性,使用寿命长。

## TPU STEEL WIRE REINFORCED HOSE

- Used for drawing and conveying water, gas, oil in industry, agriculture, fishing, building and household.
- TPU hose which pass the food grade test can be used for food industry, conveying milk, beer, beverage and so on.
- Best replacement of PVC and rubber hose.
- TPU material reinforced with high-grade steel wire screwing inlaid in the hose.
- Smooth surface, soft, flexible, high corrosion resistance, good resistance to negative pressure ability, high transparency, high abrasion proof, non-toxic, odorless and small bending radius.
- Great low temperature resistance and weather resistance, long life.

英制尺寸	公制尺寸		长度	最大工作压力	最大爆破压力	重量
	I.D.mm	O.D.mm		MAX.W.P	MAX.B.P	
				At 23°C		
INCH	I.D.mm	O.D.mm	M/ROLL	Bar	Bar	g/m
1/2"	12	18	100	8	24	220
5/8"	15	22	50	6	18	300
3/4"	19	26	50	6	18	360
3/4"	20	26	50	6	18	320
7/8"	22	27	50	6	18	300
1"	25	33	50	5	16	540
1-1/4"	32	40	50	5	16	700
1-1/2"	38	48	50	5	15	1000
1-3/4"	45	56	50	5	15	1300
1-7/8"	48	59	50	5	15	1400
2"	50	62	50	5	15	1600
2-5/16"	58	69	40	4	12	1600
2-1/2"	64	78	30	4	12	2500
3"	76	90	30	4	12	3000

30





## 橡塑管

- 采用优质的PVC和橡胶合成材料与聚酯纤维线加工而成。
- 色泽艳丽。
- 质轻、柔软弹性更好便于移动。
- 耐用性好，内外层光滑，在低温环境下不易扭曲。
- 适用于各类空气压缩机和设备等等。
- 抗紫外线，防晒。

## PVC&RUBBER AIR HOSE

- Made of quality synthesis material of PVC and rubber and polyester fiber.
- Various kinds of brilliant color.
- Light weight, more flexible, elastic and easy to move.
- Good durability, smooth inner and outer, no twist under the low environment.
- The ideal necessity for air pumps and air compressors.
- Anti-UV.



SMOOTH  
光滑



ANTI UV  
防晒



TEM  
温度



ANTI ABRASION  
耐磨



ANTI CHEMICAL  
耐酸碱



FLEXIBILITY  
柔软 有弹性

英制尺寸	公制尺寸		长度	最大工作压力 MAX.W.P	最大爆破压力 MAX.B.P	重量
	I.D.mm	O.D.mm		At23°C		
INCH	I.D.mm	O.D.mm	M/ROLL	Bar	Bar	g/m
1/4"	6.5	12	100	20	80	100
1/4"	6.5	12.5	100	30	95	115
5/16"	8.5	14	100	20	80	130
5/16"	8.5	14.5	100	30	90	140
3/8"	10	16	100	20	80	160
1/2"	13	20	50	20	75	240
5/8"	16	25	50	20	60	380
3/4"	19	28.5	50	20	50	460
1"	25	34.5	50	15	45	580
1-1/4"	32	44	40	15	45	940
1-1/2"	38	50	40	15	40	1085
2"	50	64	40	15	30	1640




## PVC双联管

- 应用于焊接机械、民用建筑和喷漆工厂等。
- 可用于所有金属切割机上输送氧气和乙炔。
- 采用特殊PVC树脂合成材料加工而成。
- 两管焊接、易于移动操作、耐火性极好、质轻、抗腐蚀、弹性好。
- 管身不同颜色易于辨认。

## PVC TWIN WELDING HOSE

- Being widely used in welding machine, architecture and lacquer factory.
- Used for all kinds of metal-welding and cutting machines to transport Oxygen and Acetylene.
- Special formula compounding with special pvc resin.
- Good pressure resistance, color resistance, good abrasion resistant and excellent resilience.
- Different color hose for easy using.

英制尺寸	公制尺寸		长度	最大工作压力 MAX.W.P	最大爆破压力 MAX.B.P	重量
				At 23°C		
INCH	I.D.mm	O.D.mm	M/ROLL	Bar	Bar	g/m
1/4"	6.5	12.5	28	20	60	120
5/16"	8	14	28	20	60	140
3/8"	10	16	28	20	60	165
1/2"	13	20	28	20	60	230

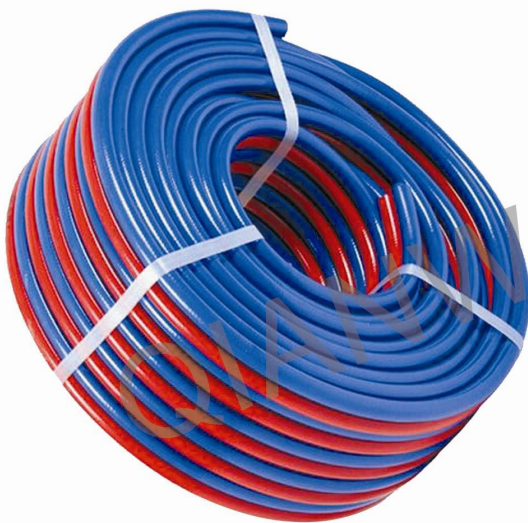



## PVC管材生产设备

## PVC HOSE PRODUCTION LINE

- 主要由自动上料机、挤出机、喷淋水箱、牵引机、绕线机、等组成。具有配套合理、结构独特、性能可靠、操作简单、维护方便、连续生产能力强等特点。

- PVC reinforced hose production line mainly consists of automatic loading machine, extruder, spray tanks, tractors, winder.

### PVC 钢丝增强软管生产线 PVC STEEL WIRE REINFORCED HOSE PRODUCTION LINE



主要技术参数 MAIN TECHNICAL DATA

型号 Model	螺杆直径(mm) Screw Diameter	长径比 L/Rs	材质 Material	主机功率 Motor Power	总功率 Mhole Power	中心高 Center High	生产范围 Scope of Product
SJ-45	45	30	38CrMnAl	7.5	18	1100	Φ12-Φ20
SJ-65	65	30	38CrMnAl	15	27	1100	Φ25-Φ38
SJ-90	90	30	38CrMnAl	30	46	1100	Φ50-Φ75
SJ-100	100	30	38CrMnAl	37	56	1100	Φ64-Φ102
SJ-120	120	30	38CrMnAl	55	80	1100	Φ75-Φ150
SJ-150	150	30	38CrMnAl	75	108	1100	Φ102-Φ200

33


### PVC 纤维增强软管生产线 PVC FIBER REINFORCED HOSE PRODUCTION LINE



主要技术参数 MAIN TECHNICAL DATA

型号 Model	螺杆直径(mm) Screw Diameter	长径比 L/Rs	材质 Material	主机功率 Motor Power	总功率 Mhole Power	中心高 Center High	生产范围 Scope of Product
SJ-45/55	45/55	30	38CrMnAl	7.5/11	38	1000	Φ6-Φ14
SJ-55/65	55/65	30	38CrMnAl	11/15	46	1000	Φ16-Φ38
SJ-75/95	75/90	30	38CrMnAl	18.5/37	80	1000	Φ50-Φ105

### PVC 优质高压水带生产线 PVC QUALITY HIGH-PRESSURE LAYFLAT HOSE PRODUCTION LINE

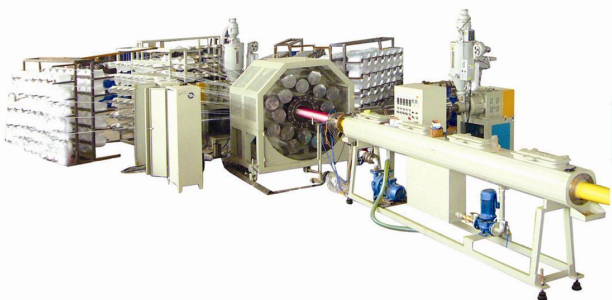

主要技术参数 MAIN TECHNICAL DATA

型号 Model	螺杆直径(mm) Screw Diameter	长径比 L/Rs	材质 Material	主机功率 Motor Power	总功率 Mhole Power	中心高 Center High	生产范围 Scope of Product
SJ-65	65	30	38CrMnAl	15	28	1100	Φ19-Φ75
SJ-90	90	30	38CrMnAl	37	52	1100	Φ75-Φ200
SJ-120	120	30	38CrMnAl	55	75	1100	Φ200-Φ305

PVC耐化学品性一览表 PVC Chemical Tolerance list ?

(注:◎-完全适合-fully apply ○-在一定条件下基本适合-basic apply under certain conditions ×-不适合-not apply)

<b>A类</b>		<b>D类</b>		硝酸60% 700CNitric Acid700C	×
空气 Air	◎	二丁醚Dibutyl Ether	×	硝基苯Nitrobenzene	×
空气 (热) Air(hot)	○	双丙酮醇 (700C) Diacetone Alcohol(700C)	×	硝酸乙烷Nitroethane	◎
乙酰胺 Acetamide	◎	邻苯二甲酸二丁酯Dibutyl Phthalate	○	<b>O类</b>	
醋酸 Acetic Acid(50% 70C)	◎	二乙醚Diethyl Ether	○	辛醇Octylalcohol	○
酸性玉米糖醇 Acidic Cone Sugar Liquors	○	二甲基甲酰胺 (700C)	◎	草酸Oxalic Acid	×
苯乙酮 Acetophenone	○	二氧六环 (700C)	×	草酸70° C Oxalic Acid	◎
丙酮 Acetone	×	<b>E类</b>		氧气 (工业用) Oxygen (industrial use)	○
乙炔 Acetylen	◎	乙醇 (室温) Ethyl Alcohol(RT)	×	油酸Oleic Acid	○
氨 (无水) Ammonia(no water)	×	乙醇 (700C)	○	<b>P类</b>	
氨 (10%) Ammonia(10%)	○	乙醇胺Ethanolamine	×	苯酚Phenol	○
氨气体 (冷)	○	乙醚 (二乙醚) Ether (Diethyl Ether)	◎	磷酸50%700CPhosphoric Acid 50%700C	○
氨气体 (热)	×	丙烯酸乙酯Ethyl Acrylate	◎	磷酸85%700CPhosphoric Acid 85%700C	×
液氨 Ammonia Liquid	×	乙基纤维素Ethyl Cellulose	◎	磷酸氯化物 700CPhosphorus Oxchloride 700C	×
氨水 Ammonia Water	×	乙稀二氯化物 (700C) Eethylene Dichloride(700C)	○	磷三氯化物 700CPhosphorus Trichloride 700C	◎
苯胺 Aniline	×	乙二醇Ethylene?Grycol	◎	松萘 Pinene	◎
硝酸氨 Ammonium Nitrate	○	<b>F类</b>		钾二铬酸Potassium Bichromate	◎
亚硝酸氨 Ammonium Nitrite	◎	脂肪酸Fatty Acid	○	氰化钾Potassium Cyanide	○
磷酸氨 Ammonium Phosphate	○	硝酸铁Ferric Nitrate	×	氢氧化钾Potassium Hydroxide	○
氯化氨 Ammonia Chloride	○	硫酸铁Ferric Sulfate	◎	丙烷Propane	○
戊醇 Amyl Alcohol	○	氯化铁Ferric Chloride	○	乙酸丙酯Propyl Acetate	○
砷酸 Arsenic Acid	◎	氟苯Fluorobenzene	○	丙醇Propyl Alcohol	◎
溴化铝 Aluminum Bromide	◎	二氯二氟甲烷气Freon Gas	○	丙醇700C Propyl Alcohol 700C	×
氯化铝 Alumimum Chloride	○	燃料油 (重油) Fuel Oil (heavy oil)	◎	丙烯Propylene	×
硝酸铝 Alumimum Nitrate	○	<b>G类</b>		氯化钾Potassium Chloride	○
<b>B类</b>		二醇酸 (700C) Glycolic Acid(700C)	○	石油Petroleum	○
氯化钡Barium Chloride	○	汽油Gasoline	×	硫酸钾Potassium Sulfate	○
氢氧化钡Barium Hydroxide	○	<b>H类</b>		<b>S类</b>	
硫化钡Barium Sulfide	◎	盐酸10% (室温) Hydrochloric Acid10% RT	○	色拉油Salad Oil	○
硫酸钡Barium Sulfate	×	盐酸10% (热) Hydrochloric Acid10% (hot)	×	硅油Silicon Oil	×
苯甲醛Benzaldehyde	×	氢气Hydrogen	○	四氯化硅Silicon Tetrachloride	○
苯Benzene	×	氦气Helium Gas	○	肥皂液Soap Solution	◎
轻质汽油Benzine	○	己醛Hexaldehyde	×	碳酸钠Sodium Carbonate	○
漂白剂Bleacher	◎	己烷Hexan	×	次氯酸钠30% Sodium Hypochlorite 30%	○
车闸油Brake?Oil	○	联氨Hydrazine	○	硅酸钠Sodium Silicate	○
丁烷Butane	○	无水氢氟酸Hydrofluoric Acid Anhydrous	×	硬脂酸Stearic Acid	×
乙酸丁酯Butyl Acetate	◎	过氧化氢30% (室温) Hydrogen Peroxide 30% RT	◎	硫Sulfur	◎
丁醇Buty Alcohol	×	<b>I类</b>		硫酸10% (室温) Sulfuric Acid 10% (RT)	◎
啤酒Beer	○	异丁醇Isobutyl Alcohol	◎	硫酸70% Sulfuric Acid 70%	×
<b>C类</b>		<b>K类</b>		亚硫酸Sulfurous Acid	○
重亚硫酸钙Calcium Bisulfite	×	煤油 (灯油) Kerosene(lamp oil)	○	亚硫酸钠Sodium Sulfite	○
氢氧化钙Calcium Hydroxide	×	煤油 (轻油) Kerosene(light oil)	×	过氧化钠Sodium Peroxide	○
硫化钙Calcium Sulfide	○	<b>L类</b>		硝酸钠Sodium Nitrate	○
二氧化碳Carbon Dioxide	×	液化石油气Liquified Petroleum Gas	◎	氯化钠Sodium Chloride	○
二硫化碳Carbon Disulfide	◎	氨基磺酸铅Lead Sulfamate	×	水蒸气Steam	×
一氧化碳Carbon Monoxide	◎	硫酸铅Lead Sulfate	×	<b>T类</b>	
乙酸溶纤剂Cellosolve Acetate	×	润滑油Lubricating Oil	○	焦油Tar	×
氯化溶剂类Chlorinated Solvent	×	<b>M类</b>		松节油Turpentine Oil	○
液氯Chlorine Liquid	×	氢氧化镁Magnesium Hydroxide	◎	四氯化碳Tetrachlorocarbon	○
铬酸10%700C Chromic Acid 10%700C	×	硫酸镁Magnesium Sulfate	×	四氢呋喃Tetrahydrofuran	○
铬酸2% 700C Chromic Acid 2%700C	×	氯化汞Mercuric Chloride	◎	亚砷酸二氯Thionyl Chloride	◎
铬酸25%700C Chromic Acid 25% 700C	◎	水星Methane	×	氯化锡Tin Chloride	◎
柠檬酸Citric Acid	◎	醋酸酐Methyl Acetate	◎	三氯乙酸 (700C) Trichloroacetic Acid (700C)	○
植物油Plant Oil	○	二氯甲烷Methylene Dichloride	◎	三乙醇胺Triethanolamine	◎
苯环Cyclobenzene	○	牛奶Milk	◎	汽轮机油Turbine Oil	○
环己醇Cyclohexanol	○	矿物油Mineral Oil	○	<b>W类</b>	
环己酮Cyclohexanone	○	氯化镁Magnesium Chloride	○	水Water	◎
氯气体 (干) Chlorine Gas(dry)	○	甲醇Methyl Alcohol	×	水和润滑油乳液Water and Lubricating Oil Solution	○
氯气体 (湿) Chlorine Gas(wet)	○	汞Mercury	○	<b>X类</b>	
氯仿Chloroform	×	<b>N类</b>		二甲苯Xylene	×
杂酚油Creosote Oil	×	天然气Natural Gas	○	<b>Z类</b>	
氯化钙Calcium Chloride	○	乙酸镍Nickel Acetate	○	乙酸锌Zinc Acetate	○
氯化铜Copper Chloride	○	氯化镍Nickel Chloride	○	氯化锌Zinc Chloride	○
次氯酸钙Calcium Hypochlorite	○	硫酸镍Nickel Sulfate	○	硫化锌Zinc Sulfide	◎
碳酸Carbonic Acid	○	硝酸30% (室温) Nitric Acid 30% (RT)	○	硫酸锌Zinc Sulfate	○