

VCON GLOBAL TRADING


Web: www.vcongt.com Email: sales@vcongt.com

Phone: +971 50 768 9645 City Free Zone, Sharjah

United Arab Emirates





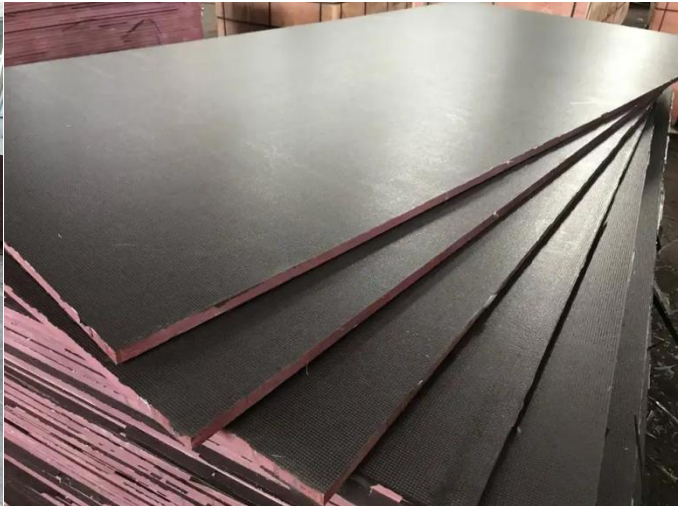



Size	1220x2440mm(4'x8'), 1250x2500mm, 915x1830(3'x6') or as per your requirement
Thickness	8-24mm
Thickness Tolerance	+/-1mm+/-0.5mm
Number of Plies	From 5 to 25 depending on thickness
Face/Back	Black Film, Brown Film, Red Film (Film can be printed with requested logo)
Finish	Glossy, Matt, Anti-slip
Core	Poplar, Hardwood, Birch, Combined
Glue	WBP, Melamine, MR
Loading Quantity	50cbm - 58cbm per 40'hq, 45cbm per 40'ft, 22.5cbm per 20'ft
MOQ	1X20'ft Container
Lead Time	15 days after receiving your prepayment or L/C
Productivity	3000cbm per month
Packing	Inner with waterproof plastic bag, outside with plywood or carton, then fastened with 3'x6' sheet iron and packed with pallets
Payment terms	TT or L/C at sight
Production Advantages:	1)Transference to concrete is set up very easily, so good for construction work.
	2)Waterproof, Wear-resistant, anti-cracking.
	3 After installation of concrete, the surface looks like a mirror. (The cement does not stick.)
	5. Environmentally friendly.
	6 It can be used for a long time, and for the initial price paid for the material, you will feel its worth over time



Size (mm)	915*1830, 1250*2500, 1220*2440, 1250*2500, 1500*2500, 1500*3000
Thickness(mm)	9, 12, 15, 18, 20, 22, 24, 30, 32
Color of surface/film	Dynea brown film, melamine brown film, Anti-Slip beown film, Black filmDark brown waterproof popl
Core	ar.hardwood,birch,pine,combi
Glue	WBP,WBP Phenolic
Moisture content	6-14%
Density	530kg/m3-700kg/m3
Items	Poplar.Hardwood.Birch
Bending Strength (N/mm)	46.55.77
Bending Modulus of Elasticity (N/mm)	5100.6250.7800
Cycle life	8-15 times.15-25 times.30-50 times

